


## Hollow Pin Chains

HKK Hollow Pin chains are constructed with cold-forged solid bushings. This process assures the inside diameter of the bushing is completely cylindrical all the way through. This unique hollow pin feature allows easy insertion of cross rods without damaging the chain or rods. Hollow Pin chain operates on standard sprockets and standard double pitch sprockets.

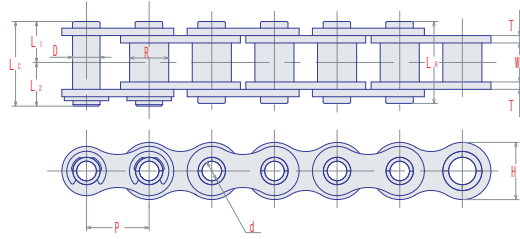


### HP STANDARD

HKK Hollow Pin Chain No.	Dimensions - mm									Average Ultimate Strength kN	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch	Roller		Hollow Pin				Plate				
		Width	Dia.	Outside	Inside	Length		Height	Thick.			
		P	W	R	D	d	L1	L2	H			
HKK 40-HP	12.70	7.95	7.92	5.63	4.03	8.4	9.2	12.0	1.5	12.7	1.77	0.58
HKK 50-HP	15.875	9.53	10.16	7.09	5.13	10.1	11.2	15.0	2.0	19.6	3.14	0.97
HKK 60-HP	19.05	12.70	11.91	8.29	6.04	13.0	14.2	18.1	2.4	28.4	4.22	1.46
HKK 80-HP	25.40	15.88	15.88	11.34	8.08	16.2	18.1	24.1	3.2	51.0	7.65	2.47

## Double Pitch Hollow Pin Chains


HKK Hollow pin chains with oil less parts are quality chains functioning rationally, combining both advantages of hollow pin chains and self-lube chains. Available on the same sprockets as double pitch roller chains.

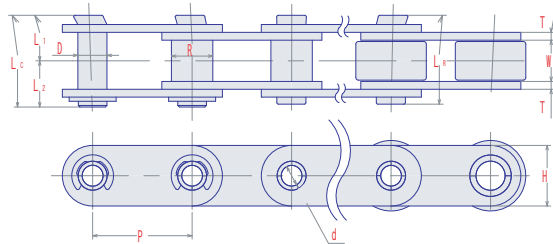

### HP DOUBLE PITCH CHAINS

HKK Hollow Pin Chain No.	Dimensions - mm									Average Ultimate Strength kN	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch	Roller		Hollow Pin				Plate				
		Width	Dia.	Outside	Inside	Length		Height	Thick.			
		P	W	R	D	d	L1	L2	H			
HKK C2040-HP	25.40	7.95	7.92	5.63	4.03	8.4	9.2	12.0	1.5	12.7	1.77	0.46
HKK C2050-HP	31.75	9.53	10.16	7.09	5.13	10.1	11.2	15.0	2.0	19.6	3.14	0.76
HKK C2060-HP	38.10	12.70	11.91	8.29	6.04	13.0	14.2	18.1	2.4	28.4	4.22	1.12
HKK C2080-HP	50.80	15.88	15.88	11.34	8.08	16.2	18.1	24.1	3.2	51.0	7.65	1.98
HKK C2042-HP	25.40	7.95	15.88	5.63	4.03	8.4	9.2	12.0	1.5	12.7	1.77	0.81
HKK C2052-HP	31.75	9.53	19.05	7.09	5.13	10.1	11.2	15.0	2.0	19.6	3.14	1.25
HKK C2062-HP	38.10	12.70	22.23	8.29	6.04	13.0	14.2	18.1	2.4	28.4	4.22	1.79
HKK C2082-HP	50.80	15.88	28.58	11.34	8.08	16.2	18.1	24.1	3.2	51.0	7.65	3.17


## Stainless Hollow Pin Chains

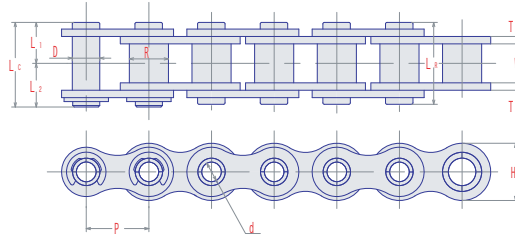

### HP-SS STANDARD

HKK Hollow Pin Chain No.	Dimensions - mm									Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Hollow Pin				Plate				
		Width	Dia.	Outside	Inside	Length		Height	Thick.			
	P	W	R	D	d	L1	L2	H	T			
HKK 40-HP SS	12.70	7.95	7.92	5.63	4.03	8.4	9.2	12.0	1.5	7.65	0.44	0.58
HKK 50-HP SS	15.875	9.53	10.16	7.09	5.13	10.1	11.2	15.0	2.0	11.8	0.69	0.97
HKK 60-HP SS	19.05	12.70	11.91	8.29	6.04	13.0	14.2	18.1	2.4	17.1	1.03	1.46
HKK 80-HP SS	25.40	15.88	15.88	11.34	8.08	16.2	18.1	24.1	3.2	31.0	1.77	2.47

## Double Pitch Stainless Hollow Pin Chains

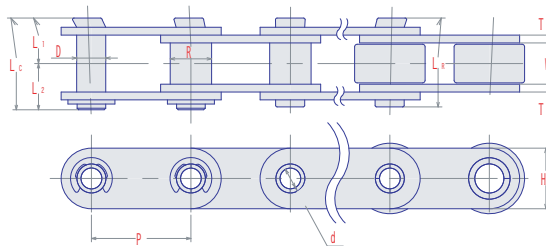

### HP-SS DOUBLE PITCH

HKK Hollow Pin Chain No.	Dimensions - mm									Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Hollow Pin				Plate				
		Width	Dia.	Outside	Inside	Length		Height	Thick.			
	P	W	R	D	d	L1	L2	H	T			
HKK C2040-HP SS	25.40	7.95	7.92	5.63	4.03	8.4	9.2	12.0	1.5	7.65	0.44	0.46
HKK C2050-HP SS	31.75	9.53	10.16	7.09	5.13	10.1	11.2	15.0	2.0	11.8	0.69	0.76
HKK C2060-HP SS	38.10	12.70	11.91	8.29	6.04	13.0	14.2	18.1	2.4	17.1	1.03	1.12
HKK C2080-HP SS	50.80	15.88	15.88	11.34	8.08	16.2	18.1	24.1	3.2	31.0	1.77	1.98
HKK C2042-HP SS	25.40	7.95	15.88	5.63	4.03	8.4	9.2	12.0	1.5	7.65	0.44	0.81
HKK C2052-HP SS	31.75	9.53	19.05	7.09	5.13	10.1	11.2	15.0	2.0	11.8	0.69	1.25
HKK C2062-HP SS	38.10	12.70	22.23	8.29	6.04	13.0	14.2	18.1	2.4	17.1	1.03	1.79
HKK C2082-HP SS	50.80	15.88	28.58	11.34	8.08	16.2	18.1	24.1	3.2	31.0	1.77	3.17